



PROENERGY DOORS LTD.
PRO ENERGY CO. LTD.

www.hkproenergy.com

www.ukblogus181.com

MODEL TS30 Transparent Roller Shutters



海港城

特點

- @ 選用 聚碳酸酯(Polycarbonate Panel-PC)材料, 用模具製成 300mm闊 X 91mm高 X 3mm厚片, 據耐磨, 防撞擊, 高清透明, 不阻燃燒測試。
- @ 使用不鏽鋼管把每件PC片穿入管內製成捲閘。
- @ 路軌 - 尺寸:50mm x 50mm高, 頂軌接縫口位置會用焊接做穩固。
- @ 底座 - 擠壓成型的鋁合金框 成T 字形狀, 標準是塗上陽極氧化處理成銀色耐用。
- @ "最闊"尺寸: 15000mm, "最高"尺寸: 6000mm。
- @ 能提供"垂直式", "橫趟式"。
- @ 能手動操作, 電動操作, 手動和電動操作。



時代廣場



海港城

MODEL TS30 Transparent Roller Shutters

海港城, 12meter Long




Specification

Polycarbonate Panel	<u>Transparent panel, 3mm thickness</u> <u>size of 297mmW; size of 91mmPitch.</u>
Construction Tube	<u>Stainless Steel Grade 304, 1.0mm thickness</u> <u>or extrusion aluminum tube of 1.2mm thickness.</u>
Guiderail	<u>Standard Material made by Stainless Steel</u> <u>Grade 304 of 1.2mmthickness, on request to</u> <u>make other size and material.</u>
Bottom Bar	<u>Standard Material made by Exclusion Aluminum</u> <u>Alloy T-Section, on request to change Stainless</u> <u>steel or other size or material.</u>
Operation	<u>220V and/or 380V operator with Remote control</u> <u>and/or push button with wiring.</u>
Shutter Hood	<u>On request by client requirement.</u>


Feature

Max. Size	<u>Width ~ 15meter; Height ~ 6meter</u>
Test Report	<u>AirBus ABD0031 test; Low Flame Retardant;</u>
Operation	<u>Fully Manuel type</u> <u>Semi Manel and Electrical type</u> <u>Fully Electrical type</u> <u>Operated by System control to link up over</u> <u>TWO (2) Shutters</u>

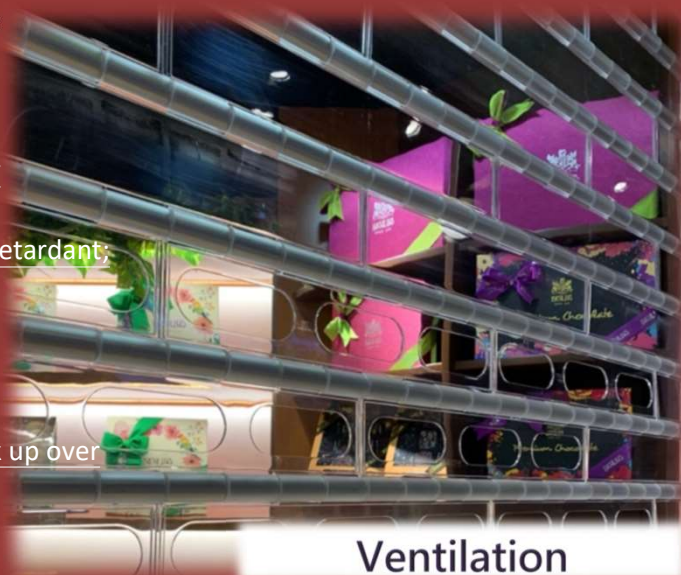



Ventilation

MODEL TS30 Transparent Roller Shutters

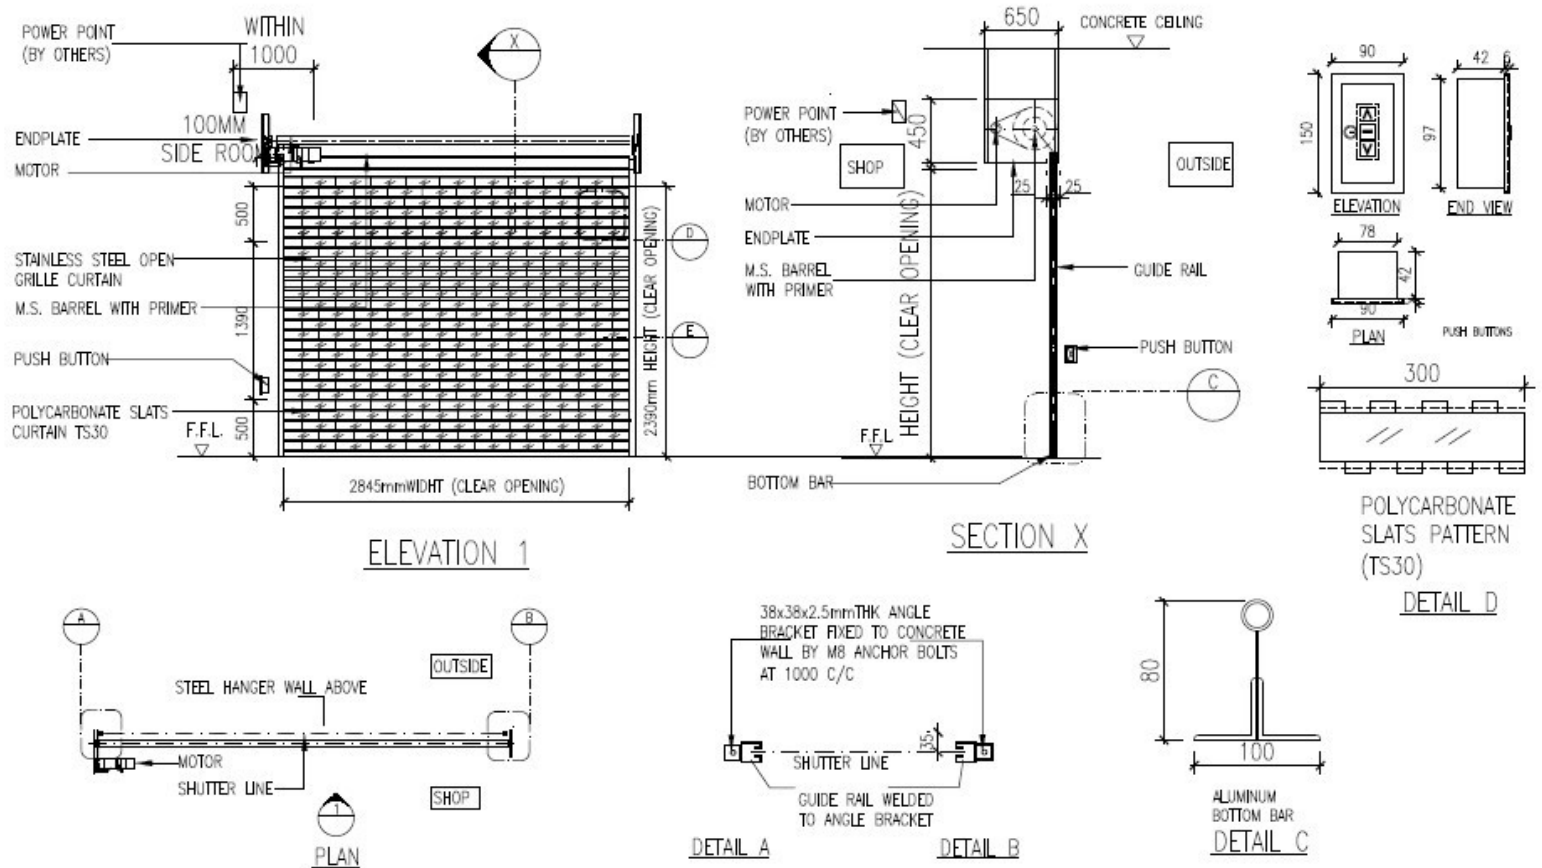

Lateral Sliding

<<可配置操作>>

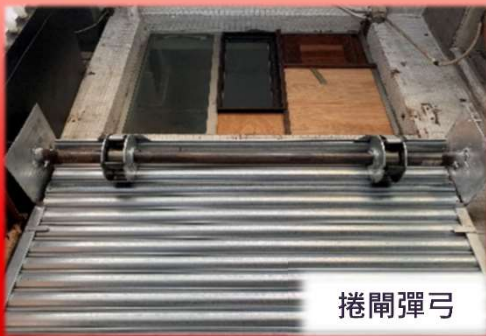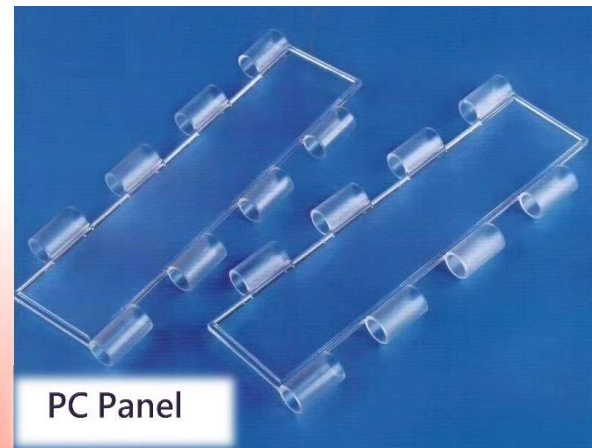

Pro Energy Co. Ltd. 順億創建有限公司

ProEnergy Doors Ltd. 順億門業有限公司

Address: Rm.02, Unit 10-13, 9/F, Wing Fat Industrial Bldg., 12 Wang Tai Rd., Kowloon Bay, Kln., H.K.

WhatsApp : +852 63077353

